
2x40 wtyk prosty raster 2.54mm


MATERIAL

Insulator:	PBT UL 94V-0
Color:	Black or white
Contact:	Brass 0.64mm(.025") square wire pins
Plating:	Gold plated


SPECIFICATIONS


Temperature range:	-25℃ ~ +85℃
Current rating:	1.0A
Voltage rating:	250V AC
Dielectric withstand voltage:	600V AC
Insulation resistance:	1000 MΩ Min.
Contact resistance:	0.015Ω Max.

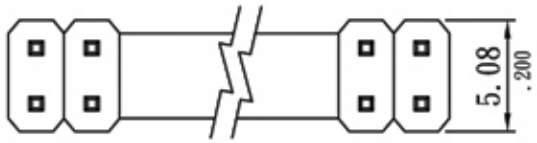



PCB LAYOUT

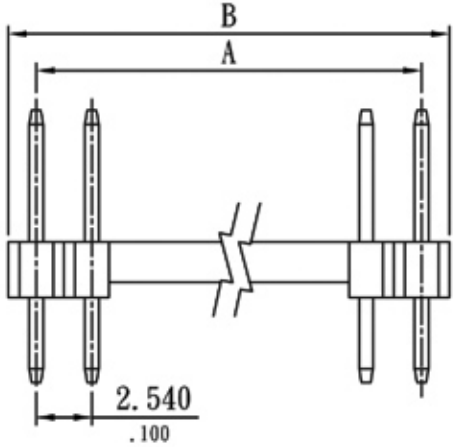



Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
4	2.54(0.100)	5.48(0.216)	30	35.56(1.400)	38.50(1.516)	56	68.58(2.700)	71.52(2.816)
6	5.08(0.200)	8.02(0.316)	32	38.10(1.500)	41.04(1.616)	58	71.12(2.800)	74.06(2.916)
8	7.62(0.300)	10.56(0.416)	34	40.64(1.600)	43.58(1.716)	60	73.66(2.900)	76.60(3.016)
10	10.16(0.400)	13.10(0.516)	36	43.18(1.700)	46.12(1.816)	62	76.20(3.000)	79.14(3.116)
12	12.70(0.500)	15.64(0.616)	38	45.72(1.800)	48.66(1.916)	64	78.74(3.100)	81.68(3.216)
14	15.24(0.600)	18.18(0.716)	40	48.26(1.900)	51.20(2.016)	66	81.28(3.200)	84.22(3.316)
16	17.78(0.700)	20.72(0.816)	42	50.80(2.000)	53.74(2.116)	68	83.82(3.300)	86.76(3.416)
18	20.32(0.800)	23.26(0.916)	44	53.34(2.100)	56.28(2.216)	70	86.36(3.400)	89.30(3.516)
20	22.86(0.900)	25.80(1.016)	46	55.88(2.200)	58.82(2.316)	72	88.90(3.500)	91.84(3.616)
22	25.40(1.000)	28.34(1.116)	48	58.42(2.300)	61.36(2.416)	74	91.44(3.600)	94.38(3.716)
24	27.94(1.100)	30.88(1.216)	50	60.96(2.400)	63.90(2.516)	76	93.98(3.700)	96.92(3.816)
26	30.48(1.200)	33.42(1.316)	52	63.50(2.500)	66.44(2.616)	78	96.52(3.800)	99.46(3.916)
28	33.02(1.300)	35.96(1.416)	54	66.04(2.600)	68.98(2.716)	80	99.06(3.900)	101.60(4.000)