
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT 2011 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| DW | — |


REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | B | REVISED (ECO-11-013077) | 23JUN'11 | J.C. | W.K. |

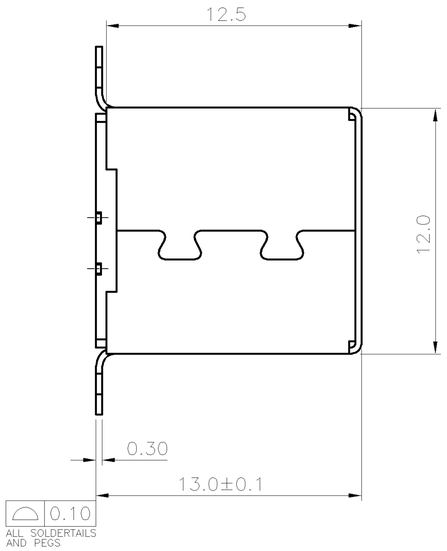




NOTES :


1. MATERAL:
   HOUSING: THERMOPLASTIC, UL 94V-0, COLOR: BLACK.
   CONTACT: PHOSPHOR BRONZE, THICKNESS=0.25mm.
   SHELL: PHOSPHOR BRONZE, THICKNESS=0.30mm.
2. FINISH:
   CONTACT: GOLD FLASH OVER
   0.762um [30u"] MIN. PALLADIUM-NICKEL PLATING ON CONTACT AREA,
   2.54um [100u"] MIN. MATTE-TIN PLATING ON SOLDER TAILS,
   1.27um [50u"] MIN. NICKEL UNDERPLATED OVER ALL.
   SHELL: 2.54um [100u"] MIN. NICKEL PLATED OVER
   1.27um [50u"] MIN. Cu UNDERPLATED.
3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

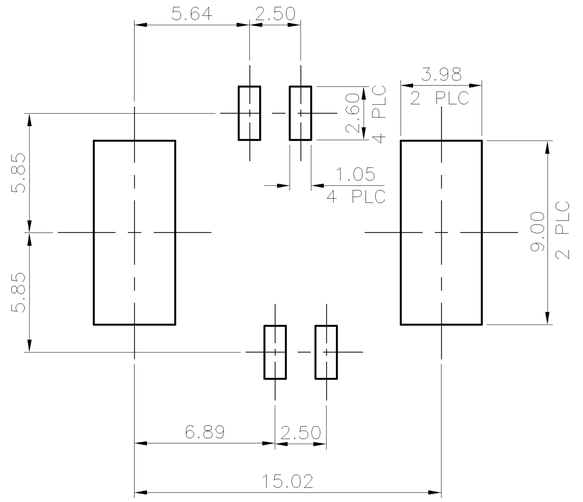



RECOMMENDED PCB LAYOUT
(TOLERANCE: ±0.05)



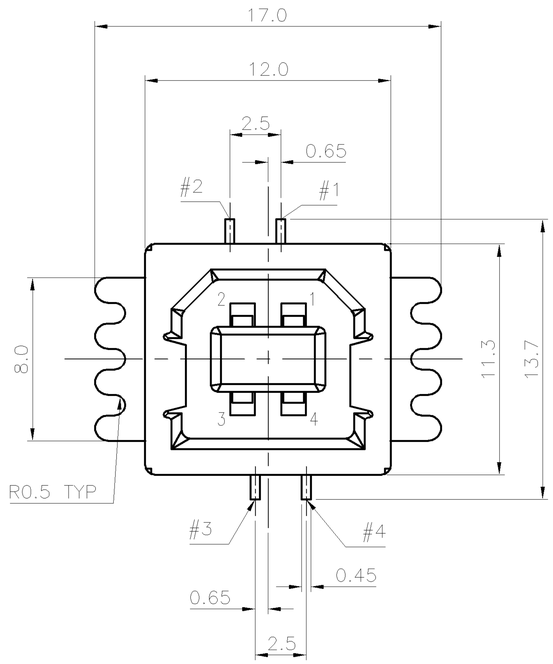

1734517-1
PART NUMBER

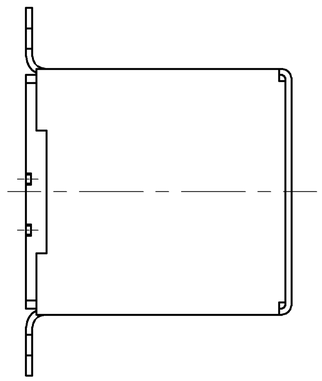THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

| | |
|---|---|
| 0 PLC | ± 0.38 |
| 1 PLC | ± 0.25 |
| 2 PLC | ± 0.13 |
| 3 PLC | ± 0.05 |
| 4 PLC | ± – |
| ANGLES | ± 3° |

MATERIAL: SEE NOTE
FINISH: SEE NOTE

| | |
|---|---|
| DWN | O. HU 22JUN2006 |
| CHK | S. HOU 22JUN2006 |
| APVD | W.J. KE 22JUN2006 |
| PRODUCT SPEC | 108-57538 |
| APPLICATION SPEC | — |
| WEIGHT | — |

TE Connectivity

NAME: USB B TYPE, TOP ENTRY, 4 POSITION, SMT TYPE

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A3 | 00779 | C-1734517 | — |


CUSTOMER DRAWING | SCALE — | SHEET 1 OF 2 | REV B

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT 2011 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


| LOC | DIST |
|---|---|
| DW | — |

REVISIONS


| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | | SEE SHEET 1. | | | |

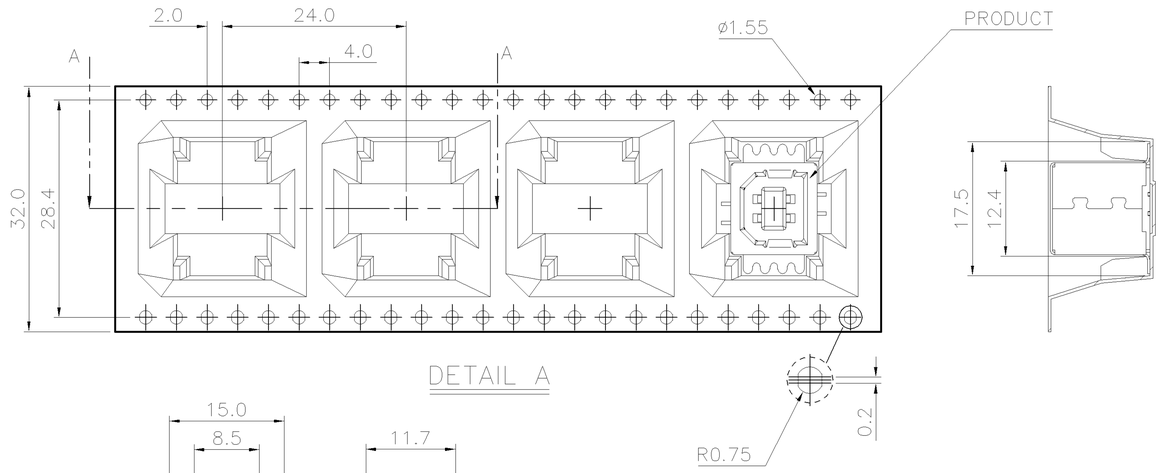



DETAIL A

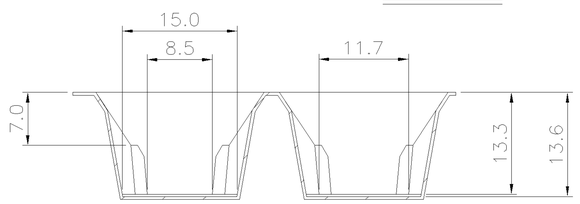



SECTION A–A

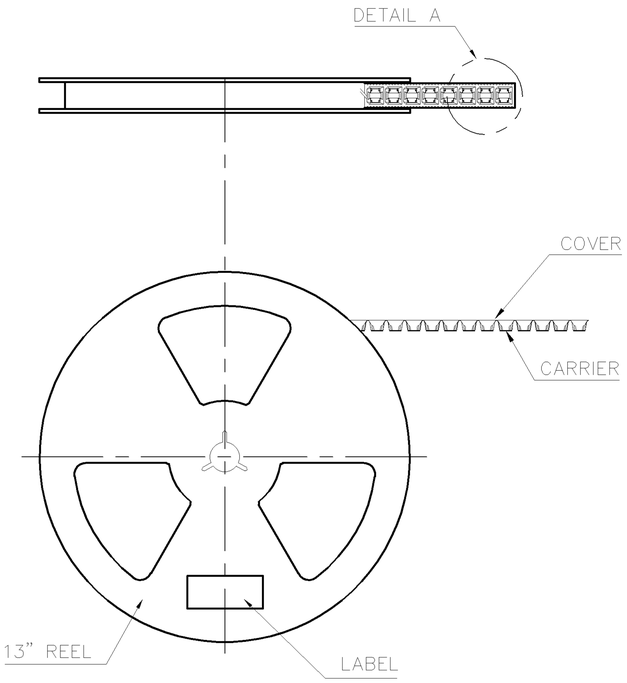

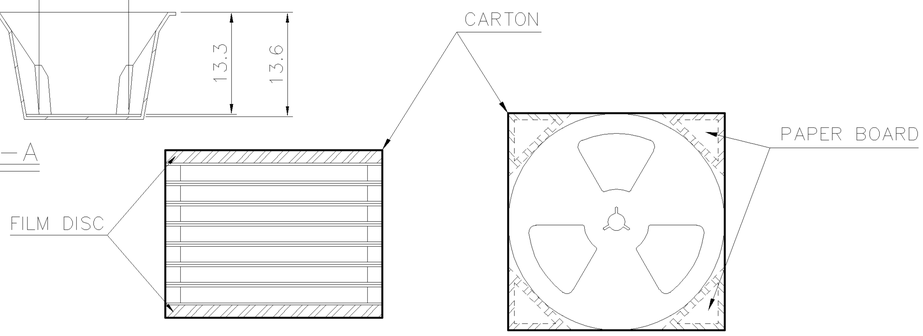
PACKING BOX

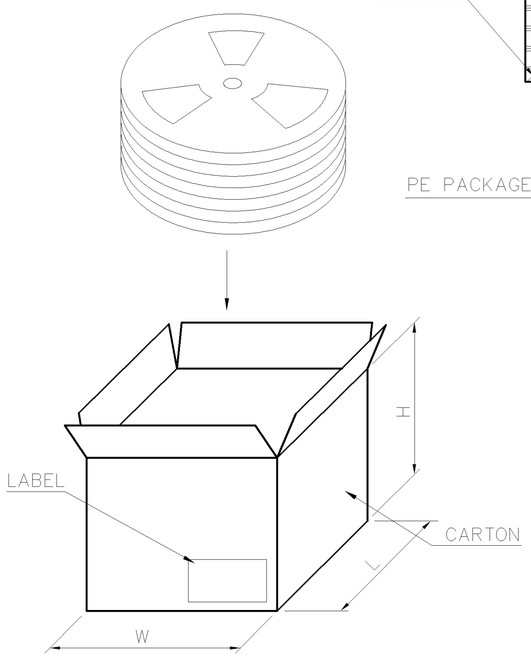


NOTES :
1. MATERAL :
   1.1 EMBOSSED CARRIER: PS.
   1.2 COVER: PET.
   1.3 CARTON: K=A.
2. DIMENSION :
   2.1 REEL: W=32.0.
   2.2 CARTON: L=348, W=348, H=340.
3. QUANTITY :
   3.1 PRIMARY PACKING: 200PCS/REEL.
   3.2 SECONARY PACKING: 8 REEL/CARTON(1,600PCS).
4. WEIGHT :
   4.1 NET WEIGHT: 8.0kg/CARTON.
   4.2 GROSS WEIGHT: 9.0kg/CARTON.
5. PEELING RESISTANCE: 10g~130g.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN –
CHK –
APVD –
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME
USB B TYPE, TOP ENTRY,
4 POSITION, SMT TYPE

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A3 | 00779 | C-1734517 | — |

CUSTOMER DRAWING | SCALE — | SHEET 2 OF 2 | REV B